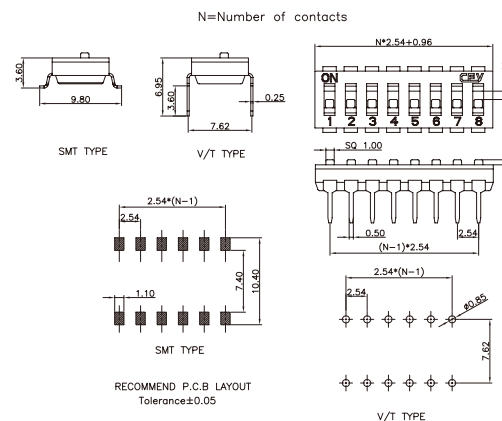
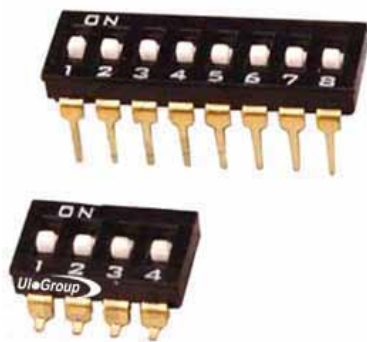


SWITCH R/A DIP & SMT TYPE

ULO-MDS428A
PITCH: 2.54mm

Specification

Operation Force:	800g Max
Stroke:	1.00mm
Operation Temperature:	-25°C~+80°C
Storage Temperature:	-45°C~+90°C
Electrical Life:	2000 Operations Cycles Per Switch
Non-Switching Rating:	100mA, 50VDC
Switching Rating:	25mA, 24VDC
Contact Resistance:	50mΩ Max. At Initial; 100mΩ Max. After Life Test
Insulation Resistance:	100mΩ, 500VDC
Dielectric Strength:	500VAC/1 Minute
Circuit:	Single Pole Single Throw
Material	
Base:	Engineering Plastics, Black
Cover:	Engineering Plastics, Black
Button:	Engineering Plastics, White
Terminal:	Alloy Copper, Gold Plating

HOW TO ORDER
