


Operation condition


Insulation Resistance	100M min (at 500VDC)
Dielectric Strength Between contacts Between contact and coil	50Hz750V 50Hz 1500V
Shock resistance	strength: 100m/s ² 11ms
	stability: 10m/s ² 11ms
Vibration resistance	10Hz~100 Hz double amplitude 1.5mm
Terminals strength	10N
Solderability	260 °C ± 5 °C 3s ± 0.5s
Ambient Temperature	-40°C ~70 °C
Relative Humidity	85% (40 °C)
Mass	11g

Dimensions


unit: mm

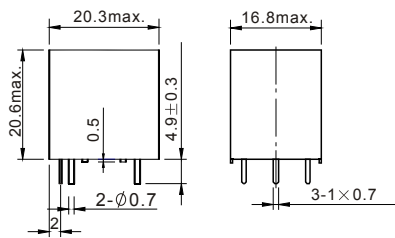

Dimensions



Mounting
(Bottom view)



Wiring diagram
(Bottom view)

Reference Data

