


position	A	B
2	6.54	2.54
3	9.08	5.08
4	11.62	7.62
5	14.16	10.16
6	16.7	12.7
7	19.24	15.24
8	21.78	17.78
9	24.32	20.32
10	26.86	22.86
12	31.94	27.94

Specifications:
 Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Brass
 Housing: PBT 830% Glass Fiber(UL 94V-0)

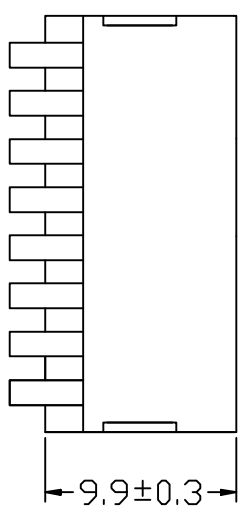

设计/revised by	绘图/drawing by	审核/checked by	批准/approved by	备注/remark	
				图名/nrtitle	文件编号/rtile no.
				160	页序/numbet
				单位/unit(s): 张数	
				公差/General Tolerances	
				X: ±0.2	X: ±0.2
				X: ±0.1	X: ±0.1
				.XX ±0.05	.XX ±0.5
				.XXX ±0.01	



新莱亚电子
 XINLE ASIA ELECTRONIC CO., LTD